



SPECIFICATIONS


- Electrical Rating : 3A 250VAC
- Mechanical life: Over 200000 cycles
- Electrical life: Over 50000 cycles
- Contact resistance: <50mΩ
- Insulation resistance: >1000MΩ
- High voltage resistance: >2000VAC 1 min.
- Ambient temperature: -20~55°C
- IP Degree: IP67,IK09
- Torque: 5~14Nm
- Operation Pressure: 2.5~4N
- LED Life: over 40000 hours

MATERIALS


- Body/Button: Stainless Steel
- Base: PBT
- Contact: Silver alloy



Terminal Description

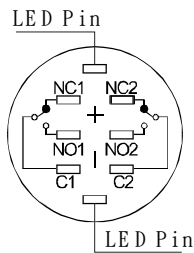




Switching Operation

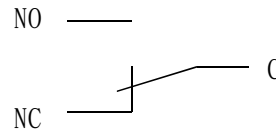

HOW TO ORDER

LAS2GQ	F	11		D	R	24V
Series	Switch Shape	Contact Configuration	Function	LED Type	LED Color	LED Voltage
		11 1NO1NC 22 2NO2NC		D Dot E Ring	R Red G Green Y Yellow O Orange B Blue W White	24V 24VDC
	F Flat H High		Momentary Z Latching (means no letter)			

Dimension of LAS2GQF series

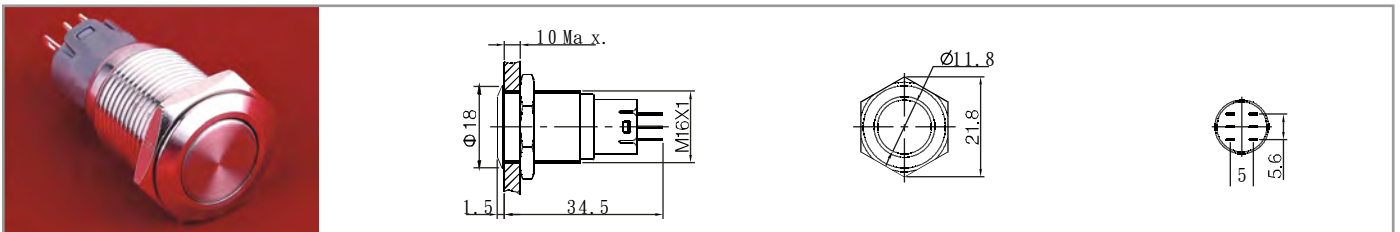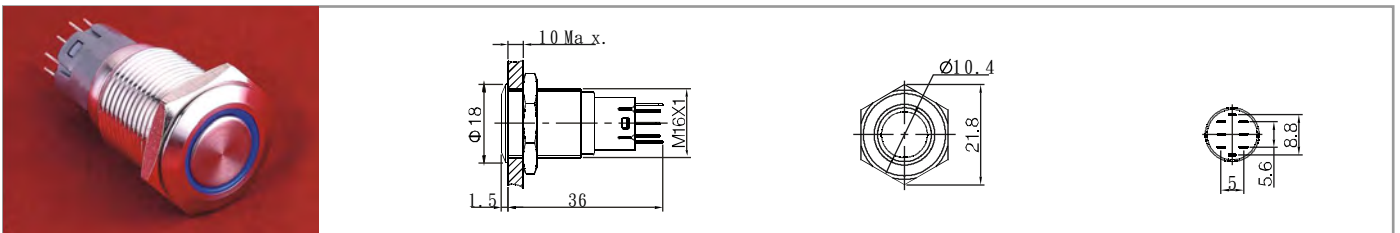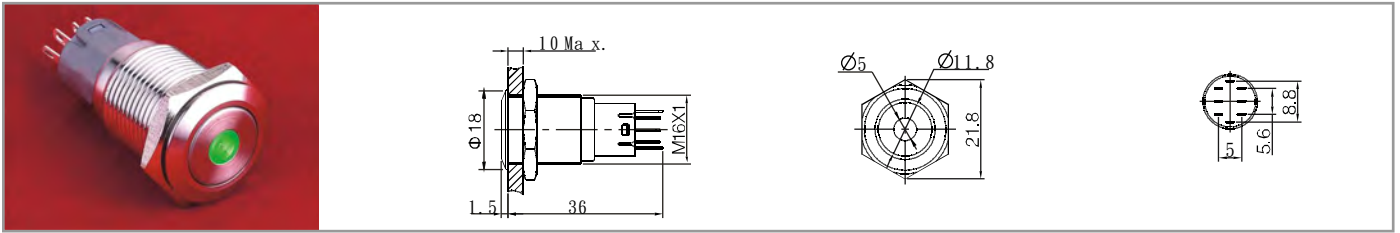

Dimension of LAS2GQH series

