




Thermostat T26 Series



T26-110-A

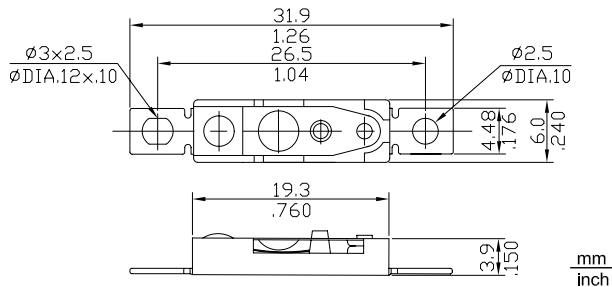

SPECIFICATION

- Contact Type: (Normally Closed)
- Electrical Rating: 9A 250V AC (Resistive Load)
- Contact Resistance: <math>< 50\text{m}\Omega</math>
- Operating Temp: 70°C ~ 150°C
- Reset Temp: 15K ~ 50K (15°C ~ 50°C)
- Ambient Temp. (Continuous Heating): 150°C max
- Over Shoot Temp. Limit: 200°C 30 SEC.
- Temp. Tolerance: A: $\pm 5\text{K}$ / B: $\pm 7.5\text{K}$
- Operating Life: 100000 Cycles (9A 250V AC UL)
- Weight: 0.95g

Unit: °C

Standard Operating Temp.	
70	115
75	120
80	125
85	130
90	135
95	140
100	145
105	150
110	

Special Temp. Order Available

FEATURES

- Competitive Price & Small Size.
- Excellent Heat Transmission & Automatic Reset.
- Fast Response To Radiant Heat.

APPLICATIONS

- Hair Dryer, Air Heater, Dish Dryer.
- Heater-Fan, Convector, Panel, etc.

HOW TO ORDER

MODEL CODE (FULL CODE)

T26 - 110 - A - U

U : UL , CUL

Grade of Tolerance : **A** = $\pm 5\text{K}$ **B** = $\pm 7.5\text{K}$

Operating Temp. : **110** °C

Model : **T26**